


MINERAL INSULATED CABLE

specification / application information

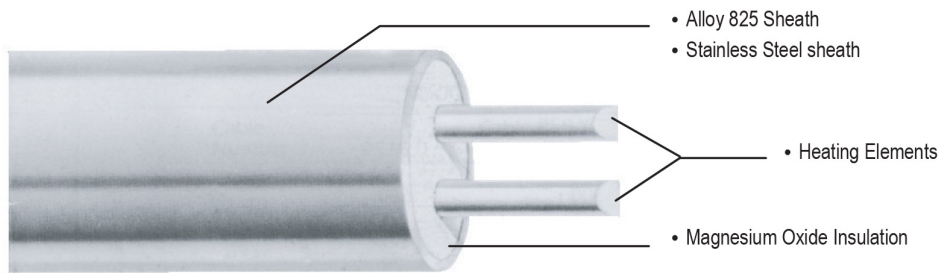

Custom Fabricated

Description

Mineral insulated cable is a metal sheathed cable that uses a metallic conductor as the heating element. The conductor is electrically insulated from the metal sheath with magnesium oxide (MgO). Mineral insulated cable is a series resistance heater that generates heat by passing current through the electrical conductor. Power output per unit length of the cable therefore varies with the applied voltage and the resistance of the conductor.

Mineral Insulated Cables are available with either one or two conductors. The one conductor cable is available in the E Form where a cold splice is provided at both cable ends for electrical connection. The two-conductor cable is available in two forms. The A Form provides an out-and-back circuit with a single cold splice connection at one end. The E Form provides cold splices at both ends of the cable.

Outer sheath construction is Alloy 825, a high temperature corrosion resistant alloy with superior flexibility. Two cable diameters are available. The K cable diameter is 0.1875" (4.76mm) and the B cable diameter is 0.3125" (7.94mm). A unique manufacturing process provides for a thin wall construction which improves flexibility and ease of installation. This process also allows the use of high performance alloy conductors for high temperature applications.

Principle of Operation:

The series conductor generates heat when voltage is applied as a result of current passing through the conductor. Power output per unit length varies with the applied voltage and circuit resistance. The circuit resistance, in turn, varies with cable length. MI cables are available with a wide selection of conductor resistances. Based on voltage and desired cable length, a specific conductor is selected with a cable resistance that provides the desired power output.

Application:

Nelson MI Cable is a high performance, industrial grade heat tracing cable used for applications requiring:

- High Temperature Exposure
- High Maintain Temperature
- High Power Output
- Rugged Cable Construction
- Extended Heater Life
- Immunity to Stress Corrosion
- Undertank Heating (Cryogenic Tanks)
- Constant Power Output Over Entire

MI Cable is custom designed and fabricated for specififi applicaitons.

MINERAL INSULATED CABLE


specification / application information

Cable Ratings:


MI Cable

| CABLE TYPE           | K1                         | K2                         | B2                         |
|----------------------|----------------------------|----------------------------|----------------------------|
| SHEATH MATERIAL      | ALLOY 825, Stainless Steel |                            |                            |
| CABLE DIAMETER       | 0.1875" ( 4.76mm )         | 0.1875" ( 4.76mm )         | 0.3125" ( 7.94mm )         |
| NUMBER OF CONDUCTORS | 1                          | 2                          | 2                          |
| MAXIMUM VOLTAGE      | 600VAC                     | 300VAC                     | 600VAC                     |
| MAXIMUM EXPOSURE     | 1100 °F (593°C)            |                            |                            |
| MAXIMUM POWER        | 62 w/ft (204 w/m)          | 62 w/ft (204 w/m)          | 88 w/ft (289 w/m)          |
| WEIGHT               | 0.07 lbs/ft ( 0.104 kg/m ) | 0.07 lbs/ft ( 0.104 kg/m ) | 0.22 lbs/ft ( 0.327 kg/m ) |
| FORMS                | E                          | A and E                    | A and E                    |
| STANDARD COLD LEAD   | 7.0 Feet ( 2.1 Meters )    |                            |                            |


Form A (2 Conductor)

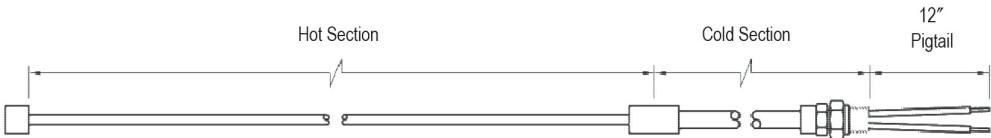

Form E (1 Conductor)

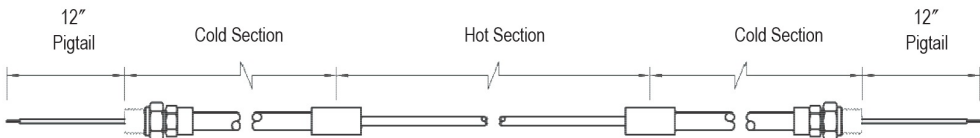

Form E (2 Conductor)

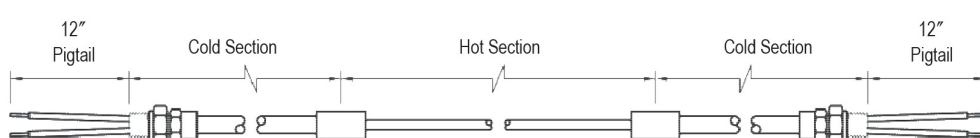

Mineral Insulated cable

MINERAL INSULATED CABLE

specification / application information

Custom Cable

Resistance Characteristics:

| 2-CONDUCTOR CABLE, 0.1875" DIAMETER ALLOY 825, Stainless Steel 300 VOLTS |                          |           |                                     |                  |
|--------------------------------------------------------------------------|--------------------------|-----------|-------------------------------------|------------------|
| Cable                                                                    | Resistance @ 68°F (20°C) |           | Maximum Exposure Temperature Rating | Resistance Curve |
| Number                                                                   | Ohms/Meter               | Ohms/Foot |                                     |                  |
| 556K                                                                     | .0430                    | .1411     | 600°F (316°C)                       | 1                |
| 658K                                                                     | .0581                    | .1906     |                                     | 1                |
| 674K                                                                     | .0742                    | .2434     |                                     | 1                |
| 693K                                                                     | .0926                    | .3038     |                                     | 1                |
| 712K                                                                     | .1170                    | .3839     |                                     | 1                |
| 715K                                                                     | .1470                    | .4823     |                                     | 1                |
| 721K                                                                     | .2130                    | .6988     |                                     | 3                |
| 732K                                                                     | .3190                    | 1.0466    | 1100°F (593°C)                      | N/A              |
| 742K                                                                     | .4160                    | 1.3648    |                                     |                  |
| 752K                                                                     | .5200                    | 1.7060    |                                     |                  |
| 766K                                                                     | .6600                    | 2.1654    |                                     |                  |
| 774K                                                                     | .7400                    | 2.4278    |                                     |                  |
| 810K                                                                     | 1.0000                   | 3.2808    |                                     |                  |
| 813K                                                                     | 1.3000                   | 4.2651    |                                     |                  |
| 818K                                                                     | 1.8000                   | 5.9055    |                                     |                  |
| 824K                                                                     | 2.3400                   | 7.6772    |                                     |                  |
| 830K                                                                     | 2.9600                   | 9.7113    |                                     |                  |
| 838K                                                                     | 3.7000                   | 12.1391   |                                     |                  |
| 846K                                                                     | 4.7200                   | 15.4856   |                                     |                  |
| 860K                                                                     | 5.6000                   | 18.3727   |                                     |                  |
| 866K                                                                     | 6.6000                   | 21.6535   |                                     |                  |
| 894K                                                                     | 9.0000                   | 29.5276   |                                     |                  |
| 919K                                                                     | 18.0000                  | 59.0551   |                                     |                  |

| 2-CONDUCTOR CABLE, 0.1875" DIAMETER ALLOY 825, Stainless Steel 600 VOLTS |                          |           |                                     |                  |
|--------------------------------------------------------------------------|--------------------------|-----------|-------------------------------------|------------------|
| Cable                                                                    | Resistance @ 68°F (20°C) |           | Maximum Exposure Temperature Rating | Resistance Curve |
| Number                                                                   | Ohms/Meter               | Ohms/Foot |                                     |                  |
| 588B                                                                     | .0071                    | .0233     | 600°F (316°C)                       | 1                |
| 614B                                                                     | .0149                    | .0489     |                                     | 1                |
| 627B                                                                     | .0270                    | .0886     |                                     | 2                |
| 640B                                                                     | .0400                    | .1312     |                                     | 3                |
| 670B                                                                     | .0650                    | .2133     | 1100°F (593°C)                      | N/A              |
| 710B                                                                     | .1040                    | .3412     |                                     |                  |
| 715B                                                                     | .1620                    | .5315     |                                     |                  |
| 720B                                                                     | .2050                    | .6726     |                                     |                  |
| 732B                                                                     | .3250                    | 1.0663    |                                     |                  |
| 750B                                                                     | .5000                    | 1.6404    |                                     |                  |
| 774B                                                                     | .7350                    | 2.4114    |                                     |                  |
| 810B                                                                     | 1.1620                   | 3.8123    |                                     |                  |
| 819B                                                                     | 1.8700                   | 6.1352    |                                     |                  |
| 830B                                                                     | 2.9700                   | 9.7441    |                                     |                  |
| 840B                                                                     | 4.3000                   | 14.1076   |                                     |                  |
| 859B                                                                     | 5.9800                   | 19.6194   |                                     |                  |

MINERAL INSULATED CABLE

specification / application information

Custom Cable

Resistance Characteristics:

| 1-CONDUCTOR CABLE, 0.1875" DIAMETER ALLOY 825, Stainless Steel 600 VOLTS |                          |           |                                     |                  |
|--------------------------------------------------------------------------|--------------------------|-----------|-------------------------------------|------------------|
| Cable                                                                    | Resistance @ 68°F (20°C) |           | Maximum Exposure Temperature Rating | Resistance Curve |
| Number                                                                   | Ohms/Meter               | Ohms/Foot |                                     |                  |
| 145K                                                                     | .0046                    | .0151     | 600°F (316°C)                       | 1                |
| 189K                                                                     | .0090                    | .0295     |                                     | 1                |
| 216K                                                                     | .0165                    | .0541     |                                     | 2                |
| 239K                                                                     | .0390                    | .1280     | 1100°F (593°C)                      | N/A              |
| 250K                                                                     | .0500                    | .1640     |                                     |                  |
| 279K                                                                     | .0790                    | .2592     |                                     |                  |
| 310K                                                                     | .0950                    | .3117     |                                     |                  |
| 316K                                                                     | .1570                    | .5151     |                                     |                  |
| 326K                                                                     | .2600                    | .8530     |                                     |                  |
| 333K                                                                     | .3300                    | 1.0827    |                                     |                  |
| 346K                                                                     | .4570                    | 1.4993    |                                     |                  |
| 372K                                                                     | .7300                    | 2.3950    |                                     |                  |
| 412K                                                                     | 1.1700                   | 3.8386    |                                     |                  |
| 415K                                                                     | 1.4800                   | 4.8556    |                                     |                  |
| 423K                                                                     | 2.3600                   | 7.7428    |                                     |                  |
| 430K                                                                     | 2.8000                   | 9.1864    |                                     |                  |
| 447K                                                                     | 4.5000                   | 14.7638   |                                     |                  |

Note: Factory design required for the following applications:  
1. Exposure temperature greater than 1100°F (593°C).  
2. Maintain temperature greater than 400°F (204°C).




Mineral Insulated cable

MINERAL INSULATED CABLE

specification / application  
information

MINERAL INSULATED CABLE

specification / application  
information

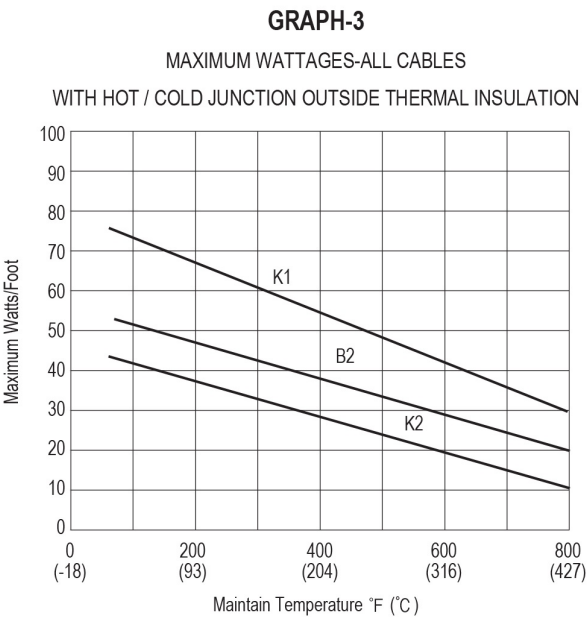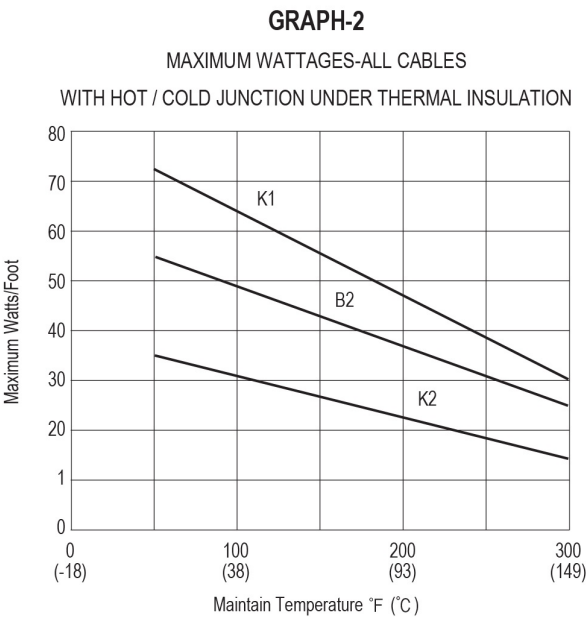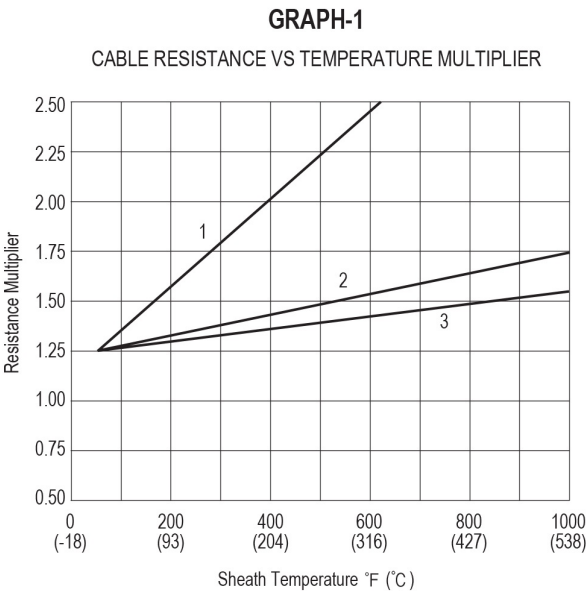

Approvals:

Note: Cable voltage, amps and watts must be provided for approval tags. Calculated sheath temperature must also be provided for hazardous (classified) approval tags.

FM

Ordinary Locations  
Hazardous (Classified) Locations  
(FH Suffix)  
Class I, Division 1 and 2  
Groups A, B, C, D  
Class II, Divisions 1 and 2  
Groups E, F, G  
Class III, Divisions 1 and 2



UL

Ordinary Locations  
Hazardous (Classified) Locations  
(UH Suffix)  
Class I, Division 1 and 2  
Groups B, C, D  
Class II, Divisions 1 and 2  
Groups E, F, G  
Class I, Zone 1 and 2  
Group IIB + H2



CSA

Ordinary Locations  
Hazardous (Classified) Locations  
(CH Suffix)  
Class I, Division 1 and 2  
Groups B, C, D  
Class II, Divisions 1 and 2  
Groups E, F, G  
Class III, Divisions 1 and 2  
Class I, Zone 1 and 2  
Group IIB + H2  
Zone 1, Ex de IIB + H2 T1-T6



KEMA

MI Series heating cables are approved for use in Zone 1 and Zone 2 hazardous areas by KEMA. The product type has been tested in accordance with the European Standard EN 50014:1997 and EN 50019:2000.



(EEX Suffix)  
II 2 G EEx de IIB + H2 T1-T6  
KEMA04ATEX2049X



Mineral Insulated cable